


Instruction Book

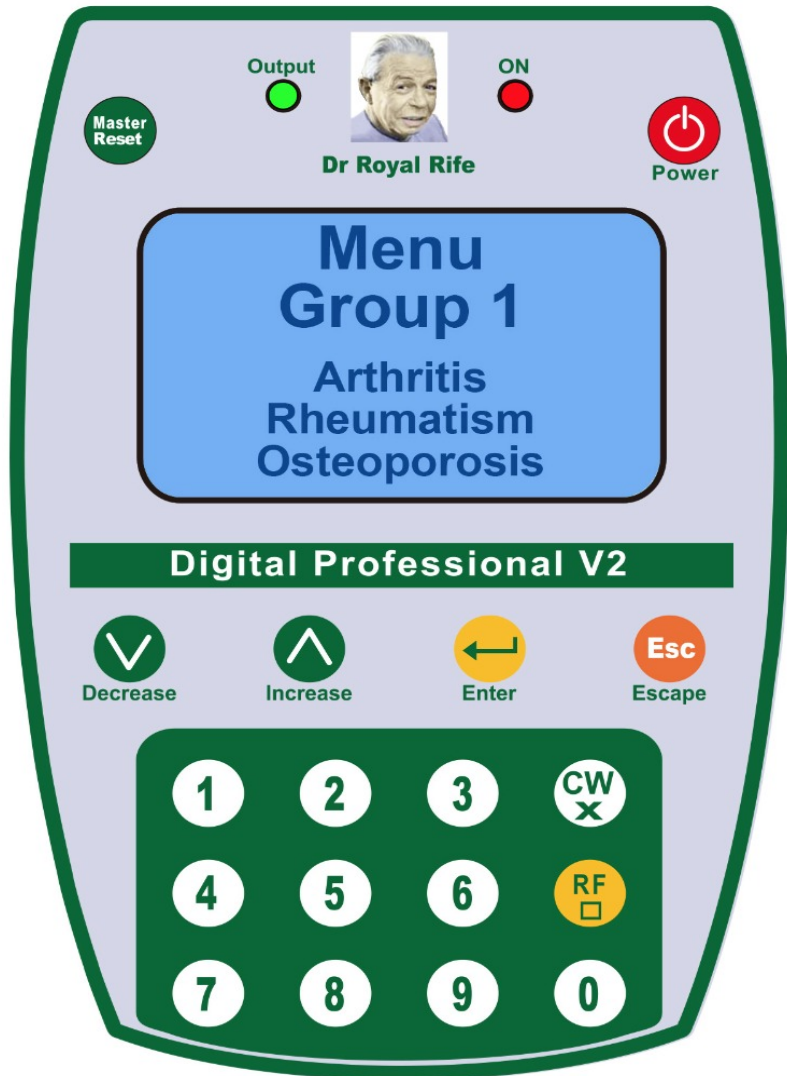

For Professional V2 Series

English

© August / 2017 - © 2018

Index	page 2
Introduction	page 3
. Technical Information	page 4
. How to wear Straps	page 5-6
. The Professional V2 Keyboard	page 7-8
. The Professional V2 Series	page 9
. Quickstart and Voltage Adjustment	page 10-11
. Setting Language (English / Japan / Spanish)	page 12

Automatic Functions on Professional V2

. Super Sweep	page 13-14
. Convergence Sweep	page 15-16

25 GROUP: Selection under MENU

	Page 17
. Group Selection and Commands	page 18-19
. Mode: RUN	page 20-22
. Mode: PULSE-RUN	page 23
. Mode: SWEEP	page 24-26
. Mode: PULSE-SWEEP	page 27
. Mode: PROGRAM	page 28-31
. List of 20 PRESET Groups	page 32-33
. FUNCTION: (RF) Radio Frequency	page 34
. FUNCTION: (CW) Carrier Wave	page 35
. Rife Digital Professional V2 CPU Upgrade:	page 36
. FUNCTION: Master-Reset	page 37
. FAQ	page 38-41

Recommendations for Treatments

	page 42-44
. Warnings, Herxheimer Reaction, Suggestions	page 45-47
. Technical Data Spec Sheet	page 48-49
. Introduction to ETDFL, Disclaimer	page 50-51
. Contact, Sales, Service in English	page 52

OTHER LANGUAGE BOOKS

- . Refer to the USB Drive which was shipped with your PRO.v2

ETDFL

- . Refer to the USB Drive which was shipped with your PRO.v2

Introduction:

Congratulations on your purchase of your Professional V2 Series Electro-Therapy-Device (ETD). The following guide provides an introduction to Electrotherapy and recommendations for the use of your device. Also provided is the official ETDFL frequency list, revised for your device, an introduction on parasites and the description of a liver cleanse, that we recommend strongly. We wish you every success with your therapeutic treatments and the positive experience of using your new device!

CAUTION: This machine is an electro-therapy device with a very high frequency output potential. Read this brochure carefully and use your electro-therapy devices exactly as directed!

Basics:

What is electrotherapy treatment with the ETD for?

- Use electrotherapy to fight certain viruses, bacteria, parasites, etc. The electrotherapy works in a similar way as Homeopathy: using natural principles to heal the body. Everything around us already has an electrical charge and thus a certain electrical frequency - we are always and everywhere exposed to it. If you have a specific virus, it lives in a given frequency field. Let us assume for simplicity it lived only at one single electrical frequency. When you feed the same frequency generated by an ETD to your body (with very particular waves), the virus gets over-stimulated and dies.
- Use electrotherapy to restore vitality and health: The programs are producing a harmonic resonance in the body. Each symptom brings electric dissonance in the organism. With the more general programs such as back pain, detoxification programs for lung, liver, etc., the dissonance in the body will be transformed into harmonic resonance. Such programs are particularly useful for meridian treatments connected with 4 strap-combinations.
- Use electrotherapy for Detoxification. Detoxify Heavy Metals, Chemicals and other unwanted toxins in the organs
- Use electrotherapy for the treatment of all disease conditions.

Technical Description

Frequency range

0:01 kHz - 999.99 kHz (1 MHz)

25 Treatment Programs

- 20 Unique Treatment Groups
- + 5 (Blank) Extra User Programmable Groups
- Each Group consists of 10 treatment frequencies.
- Presets can be restored through Factory Reset.
- All 25 Groups can be reprogrammed

Frequency wave and Sideband

30 MHz Microprocessor RF/CW Frequency with square waveform; lab tested square wave. SINE wave on Beam Ray

Carrier Wave and Radio Frequency Hot Swap

Laboratory tested harmonic waveform periodic on 100% frequencies . Rife Machine Model 110 & 281 CW/RF compatible.

Voltage input

19v DC / 4500 mA (110 V / 250 V SMPS) All world voltages accepted, external DC switching-mode power supply adapter.

True Voltage output Variable (Using Oscilloscope)

12.5v, 14.5v, 17v DC with 100% positive offset

50% Voltage output Variable (Using Multimeter)

Variable 6v, 7v, 8.5v DC with 100% positive offset (Multimeter cannot detect voltage concurrent with a frequency wave)

CPU Operating Temperature (Safe) *

26° - 33° Celcius

78° - 90° Fahreneit (Normal Operating Temperature)

DUAL RCA Output socket

2 RCA Socket s , 1 Set of hand straps, 1 Set of foot straps


How to wear Straps




The best place to carry out several hours of treatment (such as overnight) is the soles of the feet in a way that the stainless steel button touches the bottom of your feet. The soles of the feet have very thick skin and are able to tolerate long periods of electrotherapy.

We recommend using the straps preferably at the soles of the feet in a way that the blue conductive coating touches the undersides of the feet. The stainless steel button must always touch the soles.

Correct Way to wear the Straps

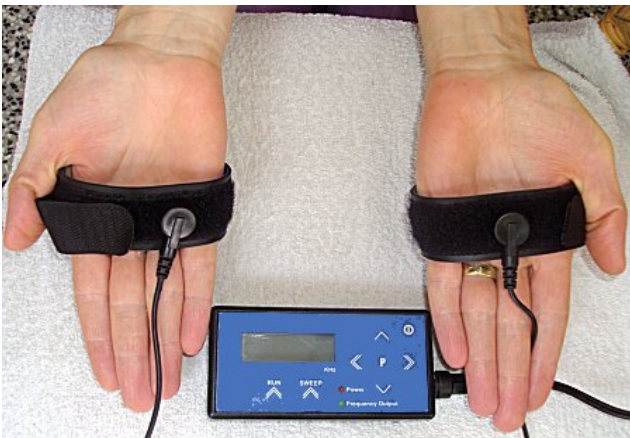

Relocate Straps to the Palms of the hands

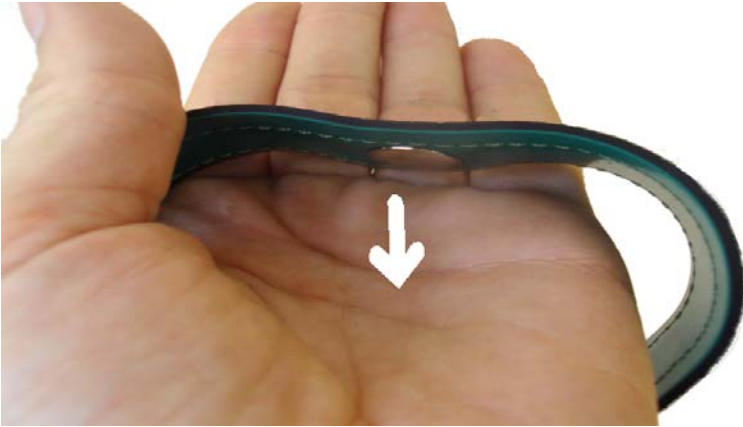

Silver Button faces palms of the hands



Or Fit Straps to the soles of your feet (Recommended)

The Professional V2 : Keyboard



Master Reset, and ON Key



or



Enter

Enter: Selects all Menu Items



Escape: Move to previous Menus



Up And Down: Move up and down Menus



Carrier Wave, Hot Swappable (see page 35)



Radio Wave Frequency (see page 34)


0 to 9

Keys 0 - 9: Keypad for Entering Frequency codes when in PROGRAM mode.



QUICKSTART: PRO V2 SERIES

- ▶ Connect Power Adapter to the Power Socket
- ▶ Connect the Power Lead to the Machine
- ▶ ON Light indicates successful connection
- ▶ You can Plug a Single Strap lead into #1
- ▶ You can Plug a Second lead into #2

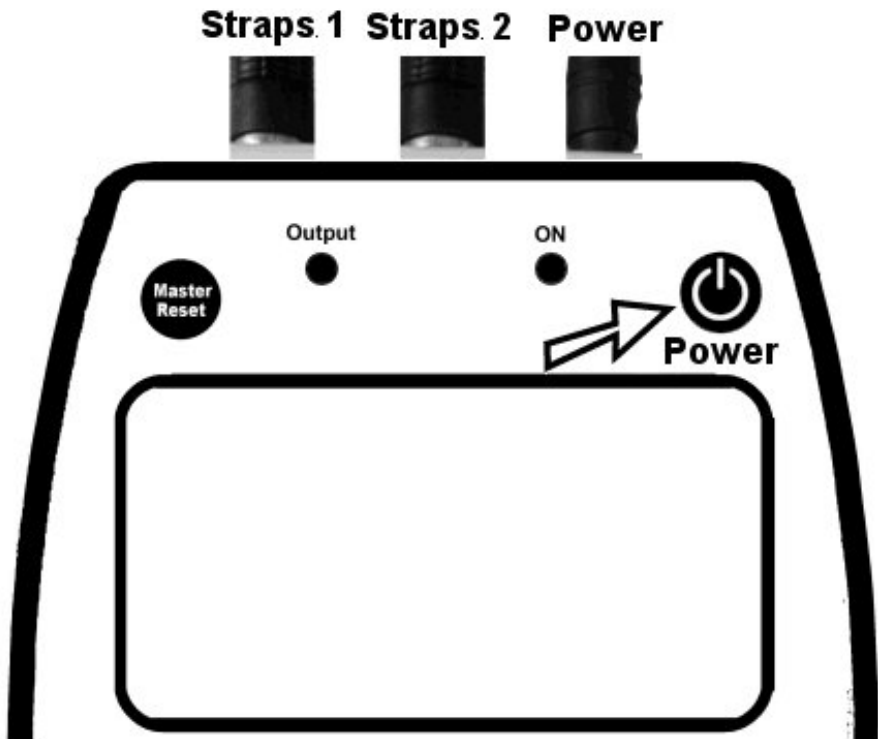

- ▶ Press Power button to turn on Machine
- ▶ LCD Display will turn on
- ▶ Machine type and info will display


Quick Start:

► First Start your new machine by pressing MASTER RESET. Top Left Corner. This will enable immediate access to Voltage (Sensitivity) Settings and Language Menu. Any Presets on Group 21 - 25 will be set to Zero



Voltage:

► First Menu is VOLTAGE. The Voltage is preset to 17v. This is the default for Rife Digital and SHOULD NOT be changed. This Voltage level provides the most effective treatment level.

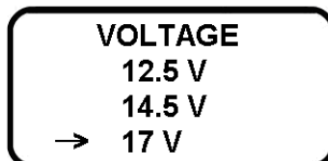


Only reduce voltage for:

- ▶ Treatment of Young Children
- ▶ Super sensitivity to frequency output
- ▶ Sensitivity causing redness or rash
- ▶ Using a Rife Healing Mat directly on skin

Many advanced tools such as Beam-Ray will only function at 17v, reducing power to Beam-Ray will cause the Beam-Ray accessory to function ineffectively.

Serious Disease frequency programs are all designed on the 17v Voltage, so for effective treatments please leave voltage at 17v

Keys which function within VOLTAGE Menu

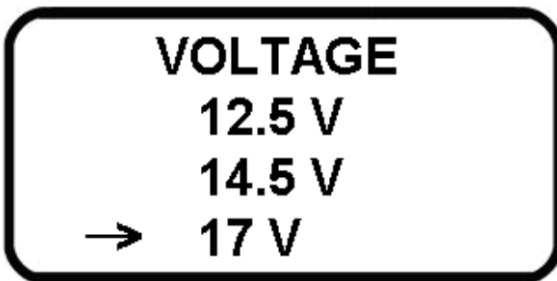

LANGUAGE:

► The Professional V2 Machine has 3 Languages Built into the machine: English (Default), Japanese and Spanish.

Language Menu:



Keys which function within Language Menu



English is Default, however selecting a different language, will make the entire machine a new language that you may not comprehend, so remember to "MASTER RESET" if you need to Default the machine back to ENGLISH.

MENU: SuperSweep / Introduction

Super-sweep is a function on the machine which permits the user to sweep every frequency up to 1 million Hz or (999.99kHz)

As every single available frequency is output to the user, the user can experience a different type of electro therapy healing which may assist in cases where specific frequencies are not providing fast results.

Super Sweep is easy to locate on the main menu, and simply pressing ENTER begins the Super Sweep “Playback”. You can pause, at any place in the cycle by pressing ENTER again, and once again ENTER resumes cycle.


It is recommended to use specific frequencies for a minimum of 10 minutes per frequency, on the specific “diseases treatment” sets outlined in the ETDFL (Frequency List);

There is however no harm to run all frequencies on occasion in the Super Sweep mode..

MODE: SuperSweep / Available Keys



▶ **ENTER: Play:** When Play appears on the screen the device output is on and the (ON) light is lit. Almost all other keys are locked in Play mode, You can attach the straps and begin your treatment in Play Mode. The frequency shown on the Display is being output to the straps

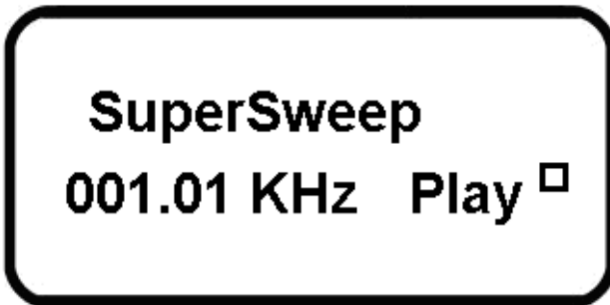

▶ **Pause:** Hit ENTER again to PAUSE program. This also unlocks all available keys

▶ **ESC:** Press ESC Key from "Pause" to return to previous menu.

▶ **Carrier Wave (CW) and Radio Frequency (RF)** Modes are Switchable in PLAY mode. (HOT SWAP)
See Page 34 - 35 for information on CW & RF

MENU: Convergence Sweep

Convergence-sweep is a new function on the device which permits the user to experience dual frequency output (2 frequencies simultaneously) using an advanced version of the super sweep function.

Frequencies output from 000.01 to 999.99
Frequencies output from 999.99 to 000.01
concurrently.

As every single available frequency is output to the user, the user can experience a different type of electro therapy healing which may assist in cases where specific frequencies are not providing fast results.


Convergence Sweep is easy to locate on the main menu, and simply pressing ENTER begins the Super Sweep “Playback”. You can pause, at any place in the cycle by pressing ENTER again, and once again ENTER resumes cycle.

Convergence Sweep runs $\frac{1}{2}$ the time of a SuperSweep session.

MODE: Convergence Sweep Keys



▶ **ENTER: Play:** When Play appears on the screen the device output is on and the (ON) light is lit. Almost all other keys are locked in Play mode, You can attach the straps and begin your treatment in Play Mode. The frequency shown on the Display is being output to the straps

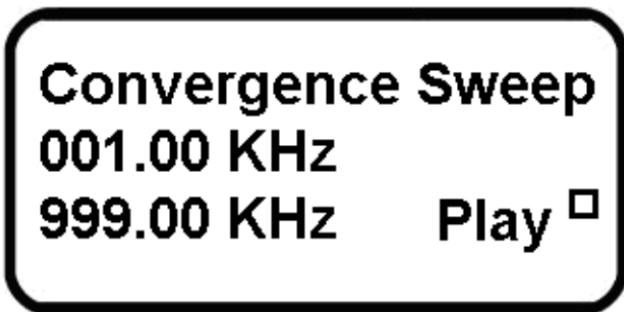

▶ **Pause:** Hit ENTER again to PAUSE program. This also unlocks all available keys

▶ **ESC:** Press ESC Key from "Pause" to return to previous menu.

▶ **Carrier Wave (CW) and Radio Frequency (RF)** Modes are Switchable in PLAY mode. (HOT SWAP)
See Page 34-35 for information on CW & RF

25 GROUP: Selection under MENU

- ▶ Use Decrease / Increase to Select Menus



- ▶ The Machine (Menu) Starts on Group #1



- ▶ Available Preset Groups are #1 - #20 Each group contains 10 frequencies
- ▶ Group #21 - #25 are empty. A good place to add your own Frequency Selections
- ▶ It is possible to erase ALL Groups #1 - #25 should you need more than 5 of your own User Programmable Groups

Group Selection and Commands

- ▶ Once you have selected your Group #1 - #25 with the ▲ UP and ▼ DOWN key, Press ENTER



Group Commands available now are:

- ▶ **RUN:** Runs a single frequency at position #0 on the current selected group.

More information on RUN, see page 20-22

- ▶ **EJECUCIÓN DEL PULSO:** Runs a single frequency at position #0 on the current selected group Pulsing ON and OFF

More information on EJECUCIÓN DEL PULSO, see page 23

► **SWEEP:** Runs all the Entire 10 frequencies #0 - #9 on the current selected group for a period of 10 minutes per frequency

More information on SWEEP, see page 24 - 26

► **PULSE SWEEP:** Runs all the Entire 10 frequencies #0 - #9 on the current selected group for a period of 10 minutes per frequency, Every second the Frequency is pulsed ON and OFF

More information on PULSE SWEEP, see page 27


► **PROGRAM:** Reprogram the current Group

More information on PROGRAM, see page 28-31

MODE: Run

The RUN function is for the specific “Play Back” of a single frequency on the Device. The RUN command will play back a user selected frequency from a list of the 10 frequencies in the “Group”

As the Professional V2 model contains “25 Groups”, the user has the opportunity to Run, in an instant, any single frequency from any Group

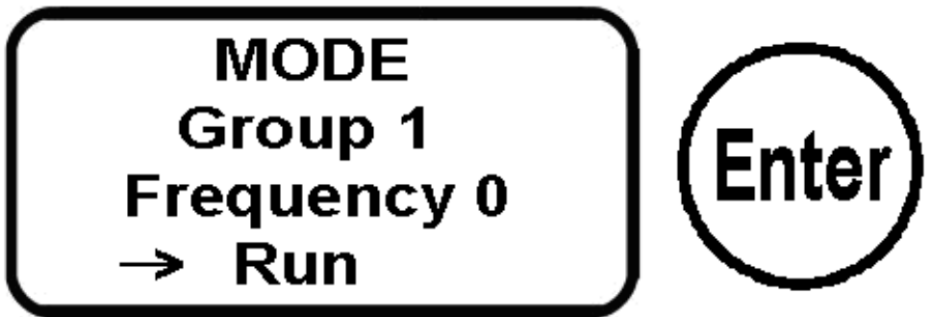

USE the ▲ UP and ▼ DOWN key to select any Single frequency from ANY Group

Any of the 35000 frequencies in the ETDFL (Frequency list) can be programmed into the device in an instant; so the user can “RUN” the recorded frequency of choice for the period desired.

RUN command is a pure “Manual” mode, and has no preset time definition. For this reason a User may select the RUN command to play back a single frequency for any determined time; for hours or even days.


Once You Have pressed ENTER, The Group you have selected is shown, plus the Frequency Position within that group, and also the number in KHZ. PLAY shows output. If you press ENTER again the program will PAUSE.

Group 1
Frequency 0
→ Run
001.01 KHz Play □

NOTE:

We would suggest that people use the SWEEP Mode (see Page 24-26) rather than RUN, as it is preferable to use multiple frequencies in the Automatic (Sweep) or (Pulsed Sweep) modes for effective disease treatments.

MODE: Run (PLAY) / Available Keys

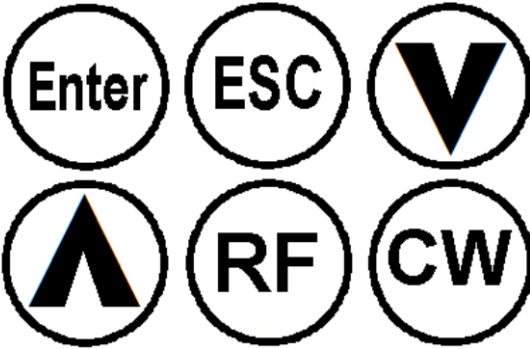

▶ **Play:** When Play appears on the screen the device output is on and the (ON) light is lit. Almost all other keys are locked in Play mode, You can attach the straps and begin your treatment in Play Mode. The frequency shown on the Display is being output to the straps

▶ **Pause:** Hit ENTER again to PAUSE program. This also unlocks all available keys

▶ **Decrease / Increase** to Select another frequency in PAUSE mode

▶ **ESC:** to go back. Will only work in Pause mode.

▶ **Carrier Wave (CW) and Radio Frequency (RF)** Modes are Switchable in PLAY mode. (HOT SWAP)
See Page 34 - 35 for information on CW & RF

MODE: Pulse Run

The Pulse Run function is identical to the “RUN” mode, with the exception that the machine Pulses one frequency every Second, rather than the normal fixed “RUN” which non pulsed)

Pulse uses a unique processor to “Store” and “Build” the Energy in a momentary Off Position, only to Pulse this Stored Energy back into the body in a quick Sweeping motion; increasing the effectiveness of the Frequency and focusing the Waveform and moving the energy deeper in the body for more efficient healing treatments.

Dr Beck discovered this method by converting one of his original Rife Devices & moving circuit output through a Canon Camera Pulsed Flash, removed from an old camera. Dr Beck found that treatments were far more effective using the Stored energy Pulsed output, than via the standard fixed output methods. The same Pulsing methods are used in your Pro-Device, using modern microchip technology.

► Follow RUN Instructions to use the "Pulse RUN" Mode. Pulse Run is identical to the RUN Command, except for the Pulsing On and Off every second.

MODE: Sweep - Introduction

The Sweep function is the timed playback function found on all the original ETD devices. The “SWEEP” mode plays back any of the 25 Groups frequencies every 10 minutes.


A Frequency set will last 100 minutes (1 hour 40 minutes). The Sweep mode will also loop continuously unless you pause or ESC (Escape) back to the menu. This permits the user to undertake overnight treatment programs without pause.

Should you wish a shorter treatment time using the SWEEP mode, then opt for the menu program “Pulse-Sweep” as an alternative. The Pulse-Sweep will run through all the Group preset frequencies every 20 – 30 seconds. Pulse-Sweep is only available on Pro V2 Series.

Sweep traditionally has been proven to be the most effective mode, only on the basis that it has been integrated and used in ETD machines for over 6 years. Client feedback has confirmed that this Original ETD Mode (Sweep) has proven to be effective for all types of conditions.

MODE: Sweep - Instructions:


Run 10 Frequencies within a Group by Selecting SWEEP

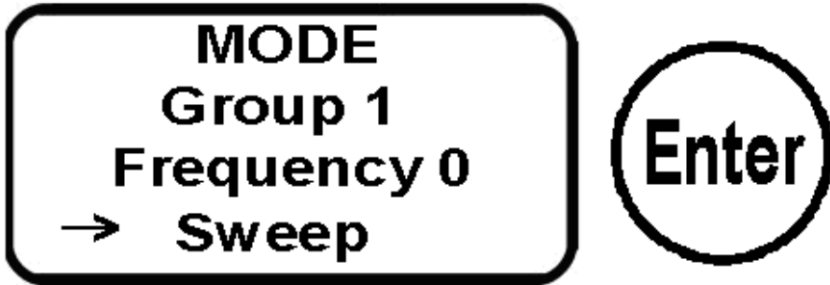

Once You Have pressed ENTER, The Group you have selected is shown, plus the Frequency Position within that group, and also the number in KHZ. PLAY shows output. If you press ENTER again the program will PAUSE.

Group 1
Frequency 0
→ Sweep
001.01 KHz Play □

MODE: Sweep (PLAY) / Available Keys

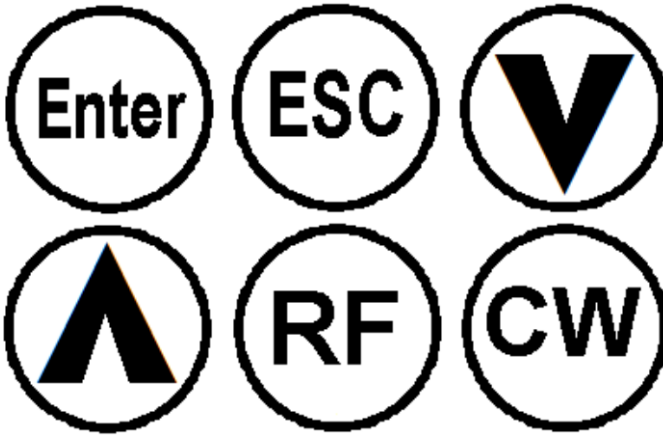

▶ Play: When Play appears on the screen the device output is on and the (ON) light is lit. Almost all other keys are locked in Play mode, You can attach the straps and begin your treatment in Play Mode. The frequency shown on the Display is being output to the straps

▶ Pause: Hit ENTER again to PAUSE program. This also unlocks all available keys

▶ ESC: to go back. Will only work in Pause mode.

▶ Carrier Wave (CW) and Radio Frequency (RF) Modes are Switchable in PLAY mode. (HOT SWAP)
See Page 34 - 35 for information on CW & RF

MODE: Pulse Sweep / Introduction

The Pulse Sweep function is identical to the “SWEEP” mode, with the exception that the machine Pulses the Group’s 10 frequencies every Second, rather than the normal “Sweep” Play-back which is 10 Minutes per frequency (non pulsed).

Pulse uses a unique processor to “Store” and “Build” the Energy in a momentary Off Position, only to Pulse this Stored Energy back into the body in a quick Sweeping motion; increasing the effectiveness of the Frequency and focusing the Waveform and moving the energy deeper in the body for more efficient healing treatments.

Dr Beck discovered this method by converting one of his original Rife Devices & moving circuit output through a Canon Camera Pulsed Flash, removed from an old camera. Dr Beck found that treatments were far more effective using the Stored energy Pulsed output, than via the standard fixed output methods. The same Pulsing methods are used in your Pro-Device, using modern microchip technology.


► Follow "SWEEP" Command to use the "Pulse SWEEP" Mode. Pulse Sweep is identical to the SWEEP Command, except for the Pulsing On and Off every second.

MODE: Program

▶ Use the ▼▲ Arrows to Move from Group 1 to Group 21 - 25



▶ Group # 21 - # 25 are empty Groups with no Presets. So are a Good place to start for storing your programs

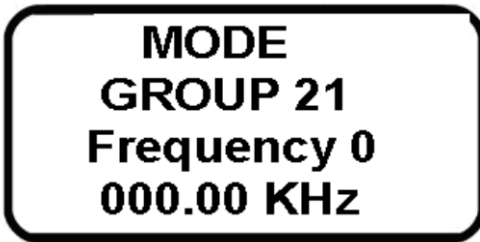

▶ Press ENTER on your device to select Group # 21, and you can see the frequency is ZERO by default

▶ Use ▼▲ Arrows to Select another Frequency Slot, or simply start programming at Frequency 0 (easiest)

- ▶ Press ENTER to select default Frequency Slot # 0



- ▶ Use the Keyboard to Enter your Frequency over the Zero's 000.00 , and Press ENTER to Confirm



- ▶ In this example below we are replacing 000.00 Khz frequency with 123.45 Khz

MODE
GROUP 21
Frequency 0
123.4  KHz

► Press ENTER to lock in the (example)
Frequency 123.45 KHz



MODE
GROUP 21
Frequency 0
123.45 KHz

Frequency 0: Is now Flashing

► Now Press ▲ UP arrow to move to the next frequency: Frequency 1



Frequency 1 : Can now be programmed

List of 20 PRESET GROUPS

Group 1 :
Arthritis, Rheumatism and Osteoporosis

Group 2 :
Asthma & Allergies Comprehensive

Group 3 :
STD Comprehensive,

Group 4 :
Hepatitis Specific, Hep A, B, C

Group 5 :
Dental Comprehensive, Oral Health

Group 6 :
Cancer Comprehensive

Group 7 :
Metastasis (Organ) Cancer Comprehensive

Group 8 :
Dr Rife's specialized MOR CW Frequency

Group 9 :
Alzheimer's and other Dementias

Group 10 :
Gram +/- Bacterial infections (cold & flu)

Group 11 :
Virus Comprehensive

Group 12 :
Hypertension (High Blood Pressure)

Group 13 :
Heart Disease & COPD Comprehensive

Group 15 :
Dr Hulda Clark Parasite General

Group 16 :
Cancer: Breast Specific

Group 17 :
Brain Disorders & Brain Diseases

Group 18 :
Molds (General) and human fungal symptom

Group 19 :
Pain, General:

Group 20:
Stress Disorders (General)

Group 21 - 25: User Programmable Groups.

FUNCTION: (RF) Radio Frequency:



- ◀ Use RF in any of the “PLAY” Modes.
- ◀ Hot-Swap between RF and (CW) Carrier Wave
- ◀ A Square □ Appears to the right of PLAY indicating RF is on

The documented information we have shows that Dr. Rife's true M.O.R.s that would resonate with organisms were the higher RF frequencies used in the Kennedy Models 110, 281 and Rife Ray #4 Rife Machine and the higher harmonic frequencies used in the Beam Rays Clinical Rife Machine. All of Dr. Rife's Machines worked on RF frequencies not audio frequencies. From the spectrum analysis of Philip Hoyland's Beam Rays Rife Machine we know that it used audio frequencies for one purpose only, to create the method of sideband harmonic spacing to hit the higher harmonic frequencies which were the true RF M.O.R.s. Henry Siner reported Philip Hoyland's design killed the organisms under microscope observation. Add to this the list of doctors who used the instruments and said they had many diseases cured. This shows that Philip Hoyland's harmonic method works beyond question

FUNCTION: (CW) Carrier Wave:



Play X

- ◀ Use CW in any of the “PLAY” Modes.
- ◀ Hot-Swap between CW and (RF) Radio Frequency
- ◀ An X Appears to the right of PLAY indicating CW on.

The documented information we have; shows that the original Beam Ray Clinical instruments worked with (CW) Carrier Wave.

The ETD Professional model can be switched into a simulation mode of the original Rife Beam Ray device at the 3.3 megahertz harmonic carrier frequency with the audio (RF) frequencies combination, which together produce sideband frequencies.

This sideband frequency lines up with the true Rife M.O.R frequency and devitalizes or renders harmless, harmful microorganisms.

The Carrier Wave was the mode used in the Original Rife machine, by Dr Rife to cure his 16 patients of a terminal condition.

Rife Digital Professional V2 CPU Upgrade:

Using the latest microchip technologies, ETD Labs have connected the original Rife Machine Model 110 and Rife Machine Model 281 Instruments, in order to output two high RF (Radio) frequencies at the same time.

This innovation has also made it possible to modulate low audio frequencies starting from 10 Hertz upwards into a high RF + Carrier Wave (CW) frequency which came from the model 281. It required over 6 months of development to combine the two Rife machines with ultra precision using the latest Microchip technologies plus unique programming algorithms.

The Rife Digital Professional V2 Running the CW (Carrier Wave) Selection, now operates as a representation of the two powerful Rife Machines, Numbered 110, and 281 respectively.

These technologies have also been transferred to the Zapper Digital Professional V2 model, so that the advances in Rife technologies, are also passed onto the Dr Clark PRO Model.

FUNCTION: Master Reset:



◀ User Master Reset to Erase all frequencies in all groups and reset the machine back to the factory configurations. Please see Page 32 - 33 for Factory Defaults.

▶ Master Reset only resets the 20 PRESET Groups back to the Factory defaults (pg 32 - 33), and erases all content in Groups 21 - 25 to Zero (0.00)

▶ Master Reset takes 1 second to complete

▶ Master Reset will only work in the initial startup MENU function, and will not engage in MODE, RUN or any other “Operating Modes”

▶ Take care not to accidentally press the Master Reset, or you will have to re-key your saved Group 20 - 25 frequencies back into the machine via the keyboard.

▶ Use Master Reset to revert your machine back to English (Default) Language, and 17v (Default) Voltage

FAQ:

Q. Which is better to use CW or RF ?

Answer:

Carrier Wave (CW) (Default) is the best mode, because it is based on the original Rife Beam Device. (RF) was considered later on the subsequent Kennedy models and would be considered a second option.

Q, Where are the frequencies located for programming my own frequencies into the machine?

Answer The ETDFL (Frequencies) are found in the last section of this book. The Frequencies are in English, as Medical English Terms and Medical descriptions are used across many languages.

Q. Can I connect this device to an external 12v Car or Solar Battery?

Answer. The PRO V2 series require 19v to operate, so if you are using directly on a battery, you will require a 12v-19v inverter . Caravans and Campers can safely plug the Power Adapter into the power socket in the van. The Adapter can be used in USA Socket (110v) or other countries (220v, 230v, 240v)

Contact Healthproducts2@gmail.com for External Battery options
The US Store has a Solar Battery Portable Device which will run the PRO V2 series off the Power Grid

Q. Can 2 people use the machine?

Answer: Yes, 2 people can use the machine. There are 2 ports on the top of the Pro Series which permit cables for 2 people.

- Only one Group can be played at one time
- Dual frequency output only available in convergence sweep mode

Programs for up to 25 people can be stored on the machine, which is useful for a clinic preparing programs for the treatment of up to 25 clients ahead of time.

Q. What is the warranty on my Professional ETD machine?

Answer: 12 months International warranty covers all international countries, Return Postage fees may apply to countries outside of UK, USA, Australia

Q. Can I buy bulk for discount or become a reseller?

Answer: yes discounts are available for bulk. Contact distributor in your area. Contacts for UK, EU, USA and Japan are on the back page.

Q. I don't like the straps, do you have an alternative?

Answer: Yes. The "Latest Rife Healing Mat" is a single sided conductive "Bed Mat" which you can lie on, without been connected to straps and wires. It is an excellent choice for back pain, and also for any other treatment programs. The MAT is available from US & UK Store, and can be ordered directly here:

(USA)

www.healthproducts2.com (Mat is displayed on Home Page)

(UK)

rifedigital.net/order ("Mat Pack" is on Cart Page)

In USA Mat is posted using USPS (US) Postal services, and is also available to all International Countries. Rife Healing Mat can only be connected to the "PRO & PRO V2" series.

In UK, and EU, the "Mat Pack" is posted with Royal Mail, including tracking

Q. From reading the Dr Rife Journal, I know that Dr Rife used Straps on his 1940's model Rife Machines, however I also know he used a Light or Lamp as an option for treatments. Will you be selling a Rife Lamp for the Professional Machine?

Answer: ETD Labs in Germany are in this moment working on a Rife Lamp to suit the Rife Digital Professional Model. This has been an ongoing project for 2 years, as the transmission of frequencies into Light requires a large amount of research and also a trial on a selection of people. We anticipate a release of the Rife Lamp in 2017 - 2018, however at this time we do not have a fixed date.

Q. I need a few extra Straps, and cables, as I work with clients, so require extra accessories

Answer:

- Velcro Straps
- Flexible Straps
- Extra Leads
- Rife Healing Mats
- Solar Powered Portable Battery Pack
- are available from US Store, and can be ordered directly here:
www.healthproducts2.com (Straps displayed on Home Page. Straps are available for International clients)

For UK and EU, World:

- Rife Healing Mats
- are available from **rifedigital.net/order** (Or email rifedigitaluk@gmail.com)

Japan

- Rife Healing Mats, Velcro Straps, Leads
- Contact above International Store

Recommendations for Treatments

General recommendations:

If you are new to this form of therapy or if you have not used the Professional V2 for a long time or ever before, we recommend starting the treatment slowly. In the <SWEEP> mode, run a maximum of one cycle a day, possibly divided in two sessions (first 5 frequencies, then a few hours later, the other 5).

After a few days with this rather conservative treatment, you can increase the treatment time to 2 <SWEEP> cycles per day. If you regularly work with the device, then you can start treating overnight for 7 - 9 hours with attached foot-straps. This way you accomplish 3 to 4 cycles during sleep and will experience very immediate healing successes. Generally speaking, sleep is not disturbed; many users even describe quite the contrary, they feel more clearer and more alert after nights on electrotherapy treatments.

The ETD Frequency book lists thousands of diseases and ailments, with accompanying 10 frequencies . Sometimes, the choice is simple, for example if you have a cold then simply program your device with the frequency set for 'common cold' and set your machine on <SWEEP>. More complicated disease conditions may require an individualized program.

General disease treatments:

General treatments would be considered Parasite Cleanses, Cold or Flu treatments, Candida or Skin diseases, bacteria, viral infections and Detoxify, to name a few. These conditions can be treated over a period of 21 – 30 days

For General Parasite Treatment we recommend the:
Parasites general comprehensive: Dr Clark (PRESET # 15)

Program the ETD with each frequency and use for 10 minutes per frequency. Many people use the ETD on the feet at night and for the first 21 days of the cleanse 7-9 hours per day or night, while resting or sleeping. Place wristbands on both feet with the Silver side touching the soles. Program all the above frequencies and allow the frequencies to cycle overnight in a loop every 100 minutes.

If you are not aware of the condition being treated, simply use one of the default frequency Presets within the machine, and use the <SWEEP> Key to run the frequencies according to the instructions above.

Serious Disease Treatments:

More serious diseases often require a longer treatment period, and often permit a course of frequencies that may change every few weeks. Our devices have been used successfully to treat serious diseases for thousands of people. Time and again, the results have shown that the extended treatment sessions have produced the best healing responses.

Extended sessions are more convenient at night, so as not to interrupt daytime activities or work schedules. An overnight session with the straps attached to the feet will permit a deeper healing which will reach and penetrate the organs of the body. For example the intestines are an organ that could previously not be reached by early frequency devices; now with the ETD, one can eliminate parasites and pathogens that inhabit the intestine and other organs such as the liver, kidneys, gall and stomach. However it does take time, and you are required to use frequencies that resonate closely with the pathogen or parasite involved. We recommend the <SWEEP> mode for this purpose as it scrolls through the 10 frequencies every 10 minutes in a loop cycle. Each frequency resonates with the healing program in order to treat the particular disease condition.

Because the ETD works using natural frequencies, three months may be a plausible time period for a remission of more serious disease conditions. Natural medicine works in this manner, on a more subtle level and over an extended period of time. Again, best results are achieved with the extended overnight treatment sessions.

How to choose the frequencies

If you have symptoms that can not be identified so easily, then there are several methods to choose your treatment program:

- To select the correct frequency or frequency set, you can work with

kinesiology (muscle testing, based on the principle that the body already knows what it needs; you can work with a kinesiology practitioner or learn this technology for your own home-use). Some clients work with the pendulum, which is also easy to learn.

- There are electrotherapeutic devices that are able to write very precise diagnostic profiles. Those are often used by homeopaths (Vega machine) or in natural healing practices (Bioresonance-Devices), such as Quantum SCIO. These are based on the same principle, only that they start from a completely healthy body and then measure and diagnose the dissonances that are present in the unhealthy body. So you could look up such a clinic, get a diagnostic profile and then treat yourself with your own device.
- Most disease frequencies are listed in the book, however Medical definitions can change over time or be compiled into a new definition. If you can't find a frequency, you may have looked in the wrong section of the book: For example: Skin Cancer would be listed as "**Cancer, Skin**". Or Tapeworms would be listed as "**Parasites, Tapeworms**" for example. If in doubt email your machine supplier for the correct frequency set, or download the PDF version of this book, and use the Adobe PDF "Search" command to find the Disease name.
- If you use your ETD regularly you will observe another important side effect: you will get to know your body much better, and will become more sensitive to the physical processes of this therapy. You will be able to assess your illnesses and therefore choose your own treatments more accurately. You will be able to identify the frequencies that are bringing you into greater health and bring in new sets of frequencies when required.

Cautionary note on Treatments

You cannot "do anything wrong" with these treatments. If (for example) you can use the device to eliminate a particular parasite, and if you do not have this parasite, then the electrical frequency may simply fade without effect on the body. There has been research that shows that pathogens live in specific frequency ranges. If you cross frequency ranges with other pathogens or parasites of a similar resonance it is likely that you can eliminate that species. We recommend changing frequency sets if you do not feel change of disease symptoms after

prolonged treatment (5 days). The ETD Frequency book will provide other frequency options to assist with further treatments.

What is Herxheimer reaction?

When you begin the electrotherapy- treatments, many parasites and pathogens are killed. This can overwhelm your immune system and lead to nausea, fatigue and dizziness. This is called the 'Herxheimer effect', or 'Parasite-Die-Off-Syndrome', an immune system response to toxins in the blood and tissues. This brief overloading of the liver and other eliminating organs worsen your symptoms at first. This can be a for a few hours, but can also last up to 2-3 days before you begin to feel much better. It is important to know that the worsening of symptoms does not mean the treatment has failed; in fact, it is exactly the opposite, namely the evidence for a very strong and effective detoxification.

What to do when a Herxheimer reaction occurs?

The most important thing is to accept this physical reaction, as a confirming result of the treatment. If it is very severe, then reduce the time of treatment, drink lots of water (at least 4 L per day) and rest (no exercise!), eat lightly to not burden your digestive system additionally, add freshly squeezed lemon juice to your drinking water and make sure that your digestion system is working properly (using Epsom salt or natural laxatives may be recommended). Take a rest from the Electro Therapy sessions for a few days until you recover.

ETD warnings

- It has been suggested that Pregnant Women should not use electro-frequency-devices.
- Pacemakers: You can use with Pacemaker, however keep machine straps, and wires more than 12" (inches) away from the chest location.
- It has been suggested that frequency output generated in the bandwidth of Lactobacillus Acidophilus: (346.05, 347.00, 348.00, 349.00, 350.00, 351.65, 352.00, 353.00, 354.00, 355.00) can trigger Candidiasis (Candida) in some people. If your treatment program ranges within the bandwidth of this natural stomach and intestinal flora, then take daily "Pro Biotic" supplements , available from health food

stores. *Lactobacillus acidophilus* is also found in natural yoghurt, Kefir and Kombucha.

Important note:

In rare cases there might be a tingling sensation on the skin due to the use of our ETD. This usually happens only when using the wrist-straps on sensitive skin such as abdomen, wrists, or other soft skin areas. To avoid this, please use the wrist-straps only in the palms of your hands or on the soles of your feet.

Using the straps in sensitive skin area despite the above described tingling sensation for a long time, can cause a local rash. If you really need to treat at these locations, please move the straps regularly every few minutes, in case of tingly sensation. The best places to conduct treatments over a longer time period are the palms of your hands and/or soles of your feet.

You may switch the voltage down on Professional V2, from 17v to 14.5v or 12.5v in order to reduce sensitivity issues also. The Voltage is preset to 17v. This is the default for Rife Digital and SHOULD NOT be changed because this Voltage level of 17v provides the most effective disease treatment level.

Only reduce voltage for:

- ▶ Treatment of Young Children
- ▶ Super sensitivity to frequency output
- ▶ Sensitivity causing redness or rash
- ▶ Using a Rife Healing Mat directly on skin

The best place to carry out several hours of treatment (such as overnight) is on the soles of the feet in a way that the stainless steel button touches the bottom of your feet. The soles of the feet have very thick skin and are able to tolerate long periods of electrotherapy.

(Picture) Example of how Straps are most effectively secured on feet



Suggestions for reliable machine operation

We would advise that the machine be placed on a firm surface, like a glass top table, wooden bedside cabinet, or on the floor if you have marble or similar surfaces.

Do not place the machine on top of beds, or inside the bed, on a carpeted floor, or on a pillow or clothing.


Do not be alarmed if the green light begins to flash on the programs 00.01 – 00.04 kHz

When using the “Super Low Range” frequencies of 00.01 – 00.04 the Green light may flash indicating that the machine is running a low frequency set. The very low frequency sets 00.01 – 00.04 are the most effective detoxify range, and for this reason, a flashing light indicator was fitted, so that doctors and health professionals could monitor their clients.

The low range detoxify sets can cause a small herxheimer reaction in some clients. This detoxify range permits speedy elimination of pathogens and bacteria in the body which can cause a small reaction in some people, such as a brief cold symptom, which would rarely last more than a few hours.

This machine has been Quality Control Passed for years of continual successful operation.

Technical Data.

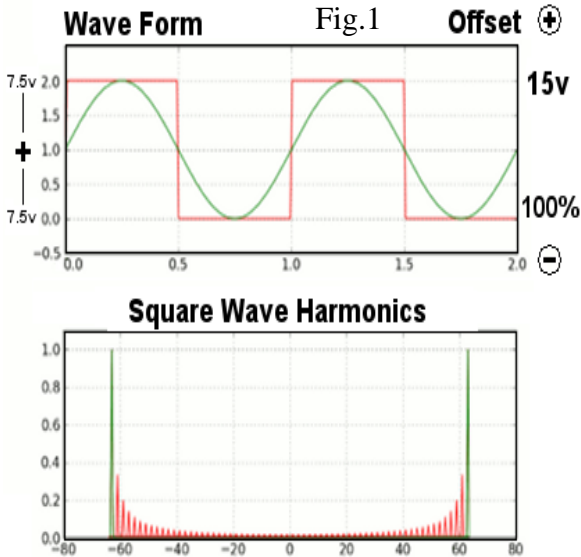

- Square Wave Output
- Voltage 17v (Oscilloscope)
- Voltage 8.5v (Multimeter)
- Cycle 100% Positive Offset
- DAC: Digital accuracy
- RF Frequencies using CW Impedance
- * Auto Switches to SINE Wave only when using Dr Rife Beam Ray LAMP Device

Laboratory tested harmonic waveform periodic on 100% frequencies

Fig. 2

DAC

Digital frequencies from Direct Digital Synthesis and Digital Signal Processing are converted to analog before they are transmitted from the ETD. These Digital-to-Analog Converters are also known as DAC. The ETD signal goes through the DAC then it passes through a Low-Pass or Bandpass Filter to finish the analog conversion. The Frequency produced is a very accurate analog frequency with all the overtones and undertones of that analog frequency.

The analog frequency produced by a digital chip can be swept up or down with more accuracy than most frequency generators. The most important thing to remember is the frequency will be converted to analog before it is output from the ETD. Digitally produced frequencies when converted to analog are the most accurate. These analog frequencies when converted to a square wave produce the square wave harmonics as seen in (Fig. 2) Radio Frequencies are produced using Carrier Wave Impedance.

WAVE TYPE

Wave type is Square Wave, the most reliable wave form tested for eliminating pathogens and disease treatments. Duty Cycle is fixed at 50% on the standard model, and 10% - 90% square wave duty cycle on the Professional V2 model under Pulse mode option. (Fig. 1) The Wave form will Switch to a Sine Wave when using Beam Ray with Rife Professional V2, in accordance with Dr Rife Beam Ray machine specifications.

VOLTAGE and AMPERAGE

Voltage Output measured by an Oscilloscope will accurately measure the top of the Square wave (8.5v) added to the bottom of the square wave (8.5v) to produce the correct output reading of 17v
Output measured by a Multimeter will accurately measure the top of the Square wave (8.5v) only. The reading is instantaneous and will not account for the total true measurement ($8.5 + 8.5 = 17v$).
So please note, if you are measuring the output on your ETD with a multimeter, do realize that the measurement shown will only reflect 50% of the total output of your ETD device. This anomaly has to do with the inability of most multimeters to accurately measure voltages from a wave form. If in doubt always test ETD output with a professional Oscilloscope. Amperage output from DC source is 4500ma.

HARMONIC FREQUENCIES

Frequencies produce harmonics which progress from high to low and again to high within the wave output sequences (Fig. 2). The harmonics of a frequency consist of overtones and undertones of that frequency. In a device like the ETD frequency generator, the harmonics go on infinitely. Because with harmonics, not only will you get the healing effects of the frequency itself, you will also make it difficult for the pathogen to elude the given frequency.

Introduction to ETD Frequency List

The revised edition of the ETD frequency list (The Electro Therapy Device Frequency List Edition Aug 2017 - 2018) provides the users of ETD a clear and comprehensive manual to use the Electronic Therapy device against various diseases and ailments.

This book has been adapted from the original CAFL-Frequency-List for use with your device and all programmable frequencies are mentioned in kilohertz (kHz).

The Electro Treatment Device List, (© ETDFL Association)

This book has been compiled by medical researchers, who use the Dr Rife Professional V2 machine in combination with the Quantum SCIO Bioresonance device to discover the particular frequencies which reflect successful medical treatments of patients at various RIFE frequency settings. The medical practitioners have made notes of the range of frequencies for a particular disease when the treatment was successful. These were then transcribed in this booklet.

Frequencies in this book reflect successful treatments using digital Electro-Therapy-Devices. They may not always be a cure for a disease, but the frequencies will assist in the relief of many diseases and illnesses. Many parasite specific illnesses can be treated and cured through the specific frequency programs outlined in the ETD Frequency lists.

All frequencies in this book are in Kilohertz (KHz). 1 KHz corresponds to 1000 Hz (i.e. 30000 Hz = 30.00 KHz). The range of the Digital Device is from 000.01 KHz up to 999.99 KHz (approx. 1 MHz (Megahertz)). This frequency compilation has been brought into a form that allows you to program the frequency sets directly into your Digital Frequency Device.

Enter the frequency sets from this booklet on the navigation console directly into your machine to achieve an improvement in your symptoms, the cure of various diseases or physical ailments.

ETDFL

E.T.D.F.L is an ongoing project by 12 Clinics across the planet who use the Quantum SCIO Bioresonance machine to record Disease frequencies of actual clients, and then produce the 10 most accurate frequencies which are deemed suitable for treatment with the Royal Rife Machine. This project began in 2006 when the original CAFL frequency list was discontinued. ETDFL became the new list, now used by more than 100,000 Royal Rife Machine users across the planet. The accuracy of the frequencies is seen in the positive results of the clients who use this Frequency List in clinics and homes in every country.

ETDFL is updated once a year. Latest PDF versions available at: ETDFL.com

PDF versions of ETDFL at **ETDFL.com** allow you to search the ETDFL Database for Disease frequencies which may be more up to date than the List provided within this book.

This Digital Professional V2 Device is licensed to use all ETDFL Royal Rife Frequency Sets © 2017 - 2018 ETDFL Berlin Germany

Disclaimer

The E.T.D.F.L. (ETDFL.com) Association holds no guarantees, that the Royal Rife frequencies within this book will cure any specific diseases. The listing is a guide compiled by Electro-Therapy medical staff, who have had successful results at each of the listed particular frequencies.

INTERNATIONAL SALES AND INQUIRIES

USA / CANADA / AUSTRALIA / World
Sales and Service

(web) www.rifedigital.com

(E) healthproducts2@gmail.com

USA ☎ 206-708-6408

International ☎ 0011-1-206-708-6408

United Kingdom & European Union,
Eastern Europe & World Wide

London UK Store, Manager: Rosalie

(web) www.rifedigital.net (E): rifedigitaluk@gmail.com

(web) www.drclark.co/uk (E): clarkzappersuk@gmail.com

UK ☎ 07376056374

International ☎ 0044 7376056374

JAPAN: この店舗の日本人顧客のみを対象とした大規模割引
ウェブサイト rifedigital.jp

マネージャー ピーター・ウィリアムズ博士

Eメール rifedigital@gmail.com



© 2017-2018, *Electro Therapy Devices Berlin Germany*

© 2017-2018, *ETDFL Berlin Germany*